



OM-DP-2180

Flagship high-speed direct injection machine



Application Scheme



Tablecloth



Flag



Meeting





Banner



Banner

Equipment parameters

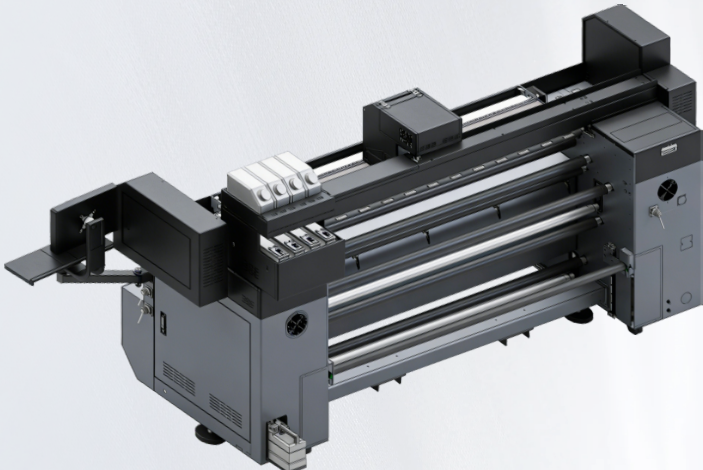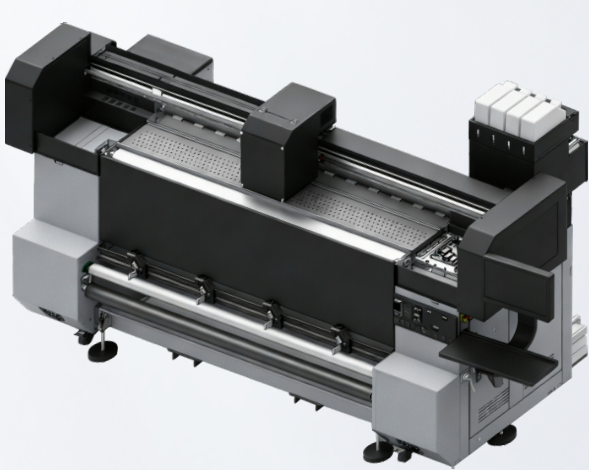

Printing Speed	>>2pass Production Mode 180m²/h	Print wide	2000mm
	>>3pass Precision Mode 120m²/h	Print interface	Network port transmission2500M/S*2
	>>4pass High precision mode 100m²/h		
Printing Heads	4pcs EPSON I3200 Print Heads	Print Colors	CMYK/CMYK Lc Lk
Cartridge capacity	3L-5L	Working Environment	3500*1065*1660mm 2800kgs, 3500W-10000W
Rated voltage	220V-380V 50hz	Package Info	3800*1090*1800mm
Basic Configuration	Magnetic Levitation, Program Tensioning, Automatic Loading, Automatic Pressing, Automatic Lifting, Automatic Ink Supply, Ink Shortage Alarm		
Optional Configuration	External Material Collection, Special Material Printing (Optional), Synchronous Material Collection And Release		
Application areas	Quick Exhibition Carpet, Quick Curtain Show, Flag, Banner		
Printing Media	Knitted fabric, satin fabric, stretch fabric, mesh fabric, satin fabric, flag fabric, banner fabric		