



OM-DP-2550

Flagship high-speed direct injection machine



Application Scheme



Tablecloth



Flag



Meeting





Banner



Banner

Equipment parameters

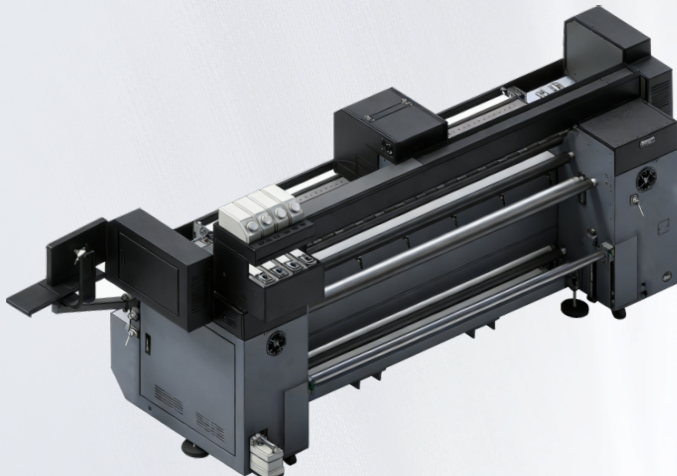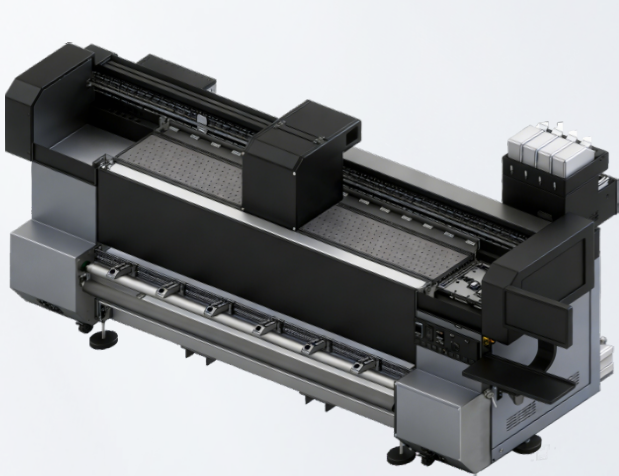

Printing Speed	>>2pass Production Mode 320m²/h	Print wide	2200mm
	>>3pass Precision Mode 240m²/h	Print interface	Network port transmission2500M/S*2
	>>4pass High precision mode 150m²/h		
Printing Heads	8pcs EPSON I3200 Print Heads	Print Colors	CMYK/CMYK Lc Lk
Cartridge capacity	3L-5L	Working Environment	3800*1140*1750mm 2800kgs, 3500W-10000W
Rated voltage	220V-380V 50hz	Package Info	4100*1190*1800mm
Basic Configuration	Magnetic Levitation, Program Tensioning, Automatic Loading, Automatic Pressing, Automatic Lifting, Automatic Ink Supply, Ink Shortage Alarm		
Optional Configuration	External Material Collection, Special Material Printing (Optional), Synchronous Material Collection And Release		
Application areas	Quick Exhibition Carpet, Quick Curtain Show, Flag, Banner		
Printing Media	Knitted fabric, satin fabric, stretch fabric, mesh fabric, satin fabric, flag fabric, banner fabric		